



ABOUT — LELU™ is a built-to-order exit sign designed for architectural interiors. The fixture is ideal for environments where superior aesthetics, illumination, and graphic performance are required.

CONSTRUCTION —

- Precision milled dimensional acrylic letters press-fit to a continuous aluminum back plate. Letters float visually with no background.
- Letters are 6" high with 3/4" stroke.
- Bracket and back plate assembly available in 4 finishes (Clear Aluminum, Satin White, Satin Black, and Polished Chrome).
- Right or Left directional indicator available for all fixtures. Chevron must be specified upon ordering and may not be added later.

POWER SOURCE OPTIONS —

- INTEGRAL power sources locate all electronics directly in the wall or ceiling adjacent to the sign which mounts directly to the face plate at the electrical box. The sign, power source, battery, battery test button and LED indicators are located together. With the INTEGRAL mounting option the sign and the power source are mounted to a .25" thick aluminum face plate which fastens to a trim ring and electrical box (see "Rough In" below). The electrical box and trim ring must be installed prior to adjacent ceiling or wall finishes.
- REMOTE power sources locate the electrical box up to **20' away** from the sign which fastens directly to the wall or ceiling with a minimal 1.75" aluminum escutcheon. The sign is located remote from the power source, battery and battery test button. With the REMOTE mounting option the sign is mounted to a round escutcheon which is mounted to an escutcheon bracket in the ceiling or wall. The power source is mounted to a .25" thick aluminum face plate which fastens to a trim ring and electrical box. The electrical box and trim ring must be installed prior to adjacent ceiling or wall finishes.
- This exit sign is not rated for exterior use.

ROUGH IN —

- Both INTEGRAL and REMOTE installations require use of *Crouse-Hinds* 3-gang electrical box (# TP871), trim ring (# TP653), and ground screws (# TP711) provided by others. See details on pages 2–3 for locations.

WARRANTY —

- 5 year limited warranty on fixture and battery.

ORDERING INFORMATION & OPTIONS

Example: **INT / Right-CL / Red-W / BB**

POWER SOURCE *	MOUNTING	CHEVRON	COLOR	FINISH	BATTERY BACK-UP
INT INTEGRAL REM REMOTE <small>*See details on pg 2–3</small>	Top Ceiling Mount Back Wall Mount Right Wall Mount Left Wall Mount	NC No Chevron CR Chevron Right CL Chevron Left	Red Red Grn Green	CA Clear Aluminum W White P Gloss Black	BB Battery Back-up (blank) None, A/C Only

Specifier's Reference

Project _____

Type _____

Model No. _____

Comments _____



LEDs / OPTICS —

- Energy-efficient compact LEDs provide bright, uniform illumination.
- LEDs and lens are available in RED or GREEN. Consult local code to compliance requirements. In order to maintain compliance with UL design standards, green exit signs may not be mounted adjacent to green surfaces and red exit signs may not be mounted adjacent to red surfaces.
- All fixtures are single-face.

ELECTRONICS —

- Dual voltage input 120/277 VAC, 60Hz, 9w max.
- Maintenance free, sealed lithium ion battery provides a minimum of 90 minutes of emergency run time with 24 hour recharge

UL LISTED —


- Compliant with UL 924.
- NFPA 101 compliant (Life Safety Code).
- Listed in the U.S. and Canada by Underwriter Laboratories.
- Designed and Made in U.S.A.




Fixtures and systems shown here subject to pending patent applications.




INTEGRAL (INT) / TOP MOUNT (Top) – NO CHEVRON (NC)

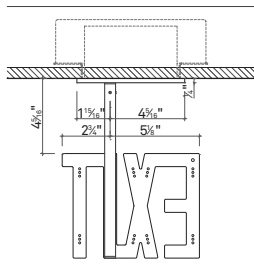

Back View

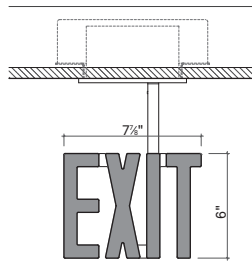


Front View




Top View


INTEGRAL (INT) / LEFT MOUNT (Left) – CHEVRON LEFT (CL)

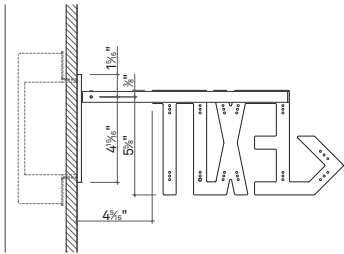

Back View

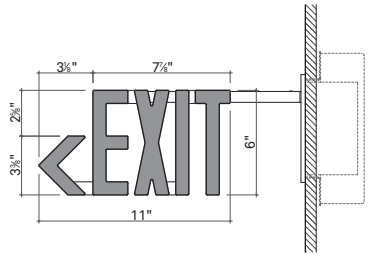


Front View

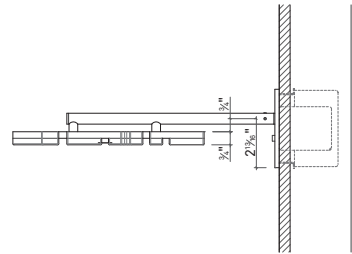


Top View


INTEGRAL (INT) / RIGHT MOUNT (Right) – CHEVRON RIGHT (CR)

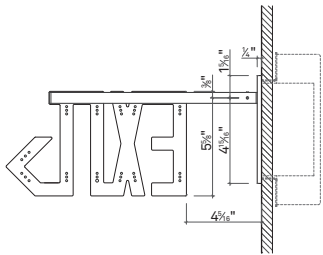

Back View

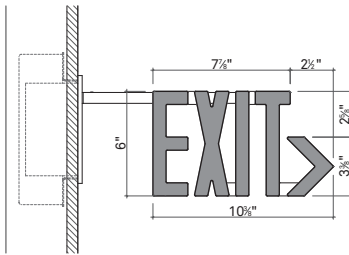


Front View

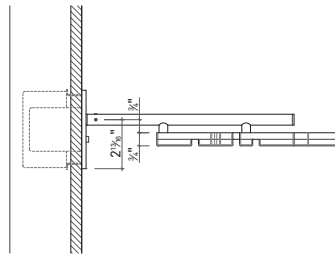

Top View


INTEGRAL (INT) / BACK MOUNT (Back) – NO CHEVRON (NC)



Back View




Front View

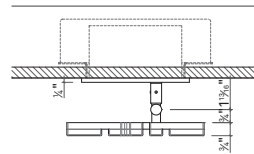


Top View




REMOTE (REM) / TOP MOUNT (Top) – NO CHEVRON (NC)

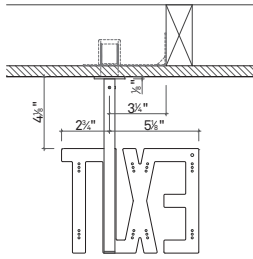

Back View

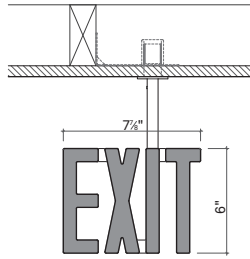


Front View




Top View


REMOTE (REM) / LEFT MOUNT (Left) – CHEVRON LEFT (CL)

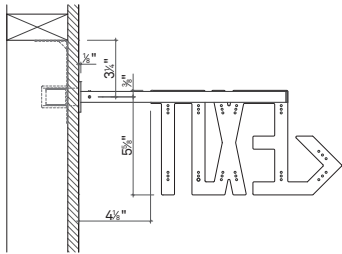

Back View

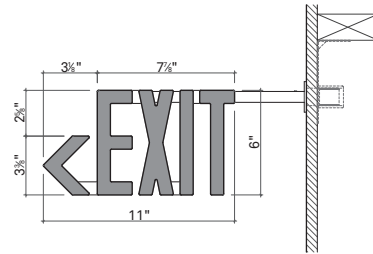


Front View

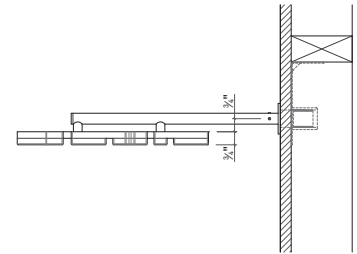


Top View


REMOTE (REM) / RIGHT MOUNT (Right) – CHEVRON RIGHT (CR)

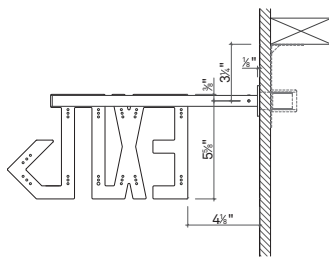

Back View

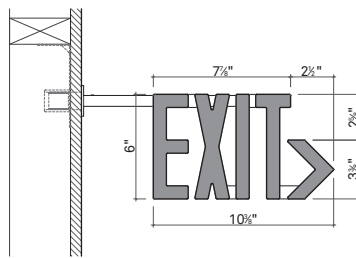


Front View

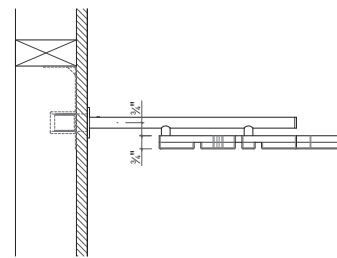

Top View


REMOTE (REM) / BACK MOUNT (Back) – NO CHEVRON (NC)



Back View



Front View



Top View